

RAM OIL 500 T MP



Depureco Industrial Vacuums USA

19121 Marketplace Avenue, Building 1, Suite 165
Plum Creek Business Park • Kyle • TX 78640

www.depurecousa.com
info@depurecousa.com



Power: 4 HP



Liquid capacity: 134 gal
Solid capacity: 18 gal



Sucking time: 74 gal/min
Dumping time: 74 gal/min

3 By-Pass motors
120V/60 Hz
Max Airflow = 345 CFM
Max Depression = 94 inH2O

Tilttable hopper with
metal swarf collecting grid.
18 gal capacity
PPL Filter (150 µ)

134 gal capacity



- Optional -

Stainless steel AISI 316
inspection door

Pivoting Ø 7.7 in
sturdy wheels

PUMP: External discharging pump
Speed discharge system 74 gal/min

DIMENSIONS

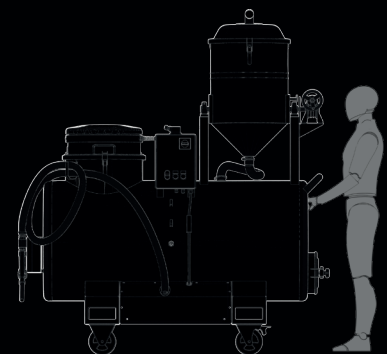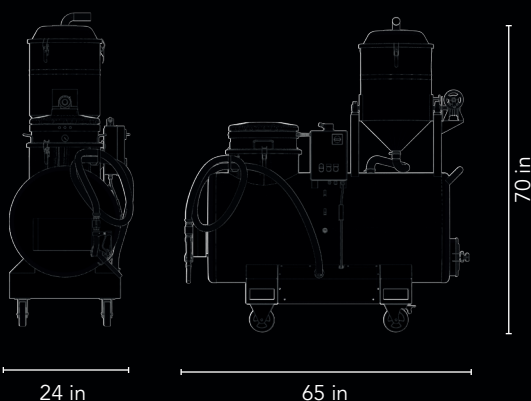

Weight: 705 lbs

SPEC SHEET

	Units	RAM OIL 500 T MP
Motors Type		3 - By-Pass
Power	HP	4
Voltage Frequency	V Hz	120/60
Maximum vacuum	inH2O	94
Maximum air flow	CFM	345
Inlet	Ø in	2
Noise level - (EN ISO 3744)	dB(A)	72
Liquid capacity	gal	134
Solid capacity	gal	18
Dimensions	in	24 x 65
Hight	In	70
Weight	lb	705
Suction time	gal/min	74
Dumping time	gal/min	74
Discharge system		
Type		External pump
Power	HP	1
Voltage/Frequency	V/Hz	110/60

INCLUDED



PPL disposal filter 150
µ efficiency



TNT filter



Oil & swarf KIT

ACCESSORIES



Oil & swarf KIT PRO