



WD

Depureco Industrial Vacuums USA

19121 Marketplace Avenue, Building 1, Suite 165
Plum Creek Business Park • Kyle • TX 78640

www.depurecousa.com
info@depurecousa.com



2/3 By-Pass motors




Power: 2.7/3,3 HP



Liquid capacity: 34 gal



P11887: Wet & Dry kit

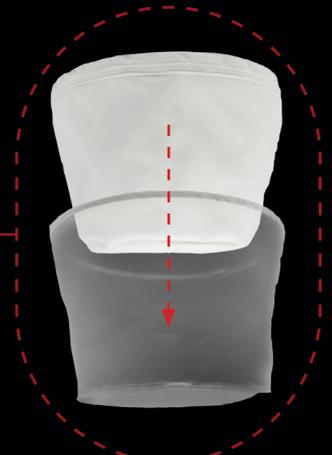

Double filtration system
Liquid filter + Solids filter




PUMP: Immersion discharge pump




Manual discharge by gravity

HIGHLY TRANSPORTABLE



22,8 in



20,9 in

45,7 in



Weight: 84 lbs

SPEC SHEET

	Units	WD 132	WD 132 P	WD 133
Motors Type		2 - By-Pass	2 - By-Pass	3 - By-Pass
Power	HP	2,7	2,7	3,3
Voltage Frequency	V Hz	120/60	120/60	120/60
Maximum vacuum	inH2O	94	94	98
Maximum air flow	CFM	230	230	336
Inlet	Ø mm	70	70	70
Noise level - (EN ISO 3744)	dB(A)	72	72	72
Liquid capacity	gal	34	34	34
Solid capacity	gal	10	10	10
Dimensions	in	22.8 x 20.9	22.8 x 20.9	22.8 x 20.9
Hight	In	45.7	45.7	45.7
Weight	lb	84	104	88
Media		Nylon	Nylon	Nylon
Discharge Type		By gravity	Submerged Pump	By gravity

OPTIONALS



STANDARD
in the 132 P
variant

**PUMP: Immersion
discharge pump**

Discharge time:
18 gal/20 sec

ACCESSORIES



Wet & Dry KIT D1,96
P11887